
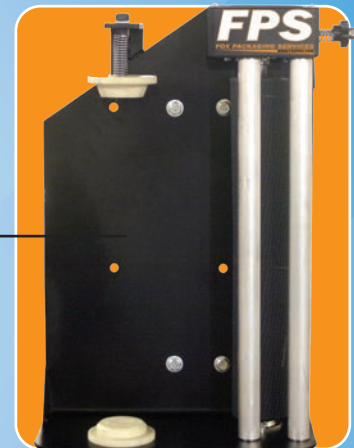
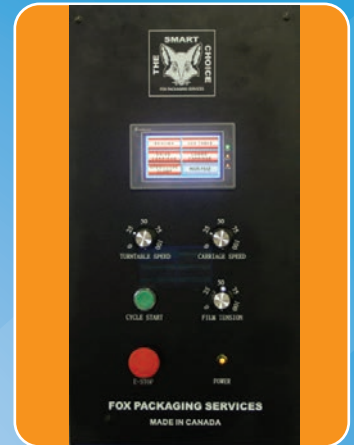


FPS 200

SPRING LOAD® DYNAMIC CARRIAGE- NON PRESTRETCH

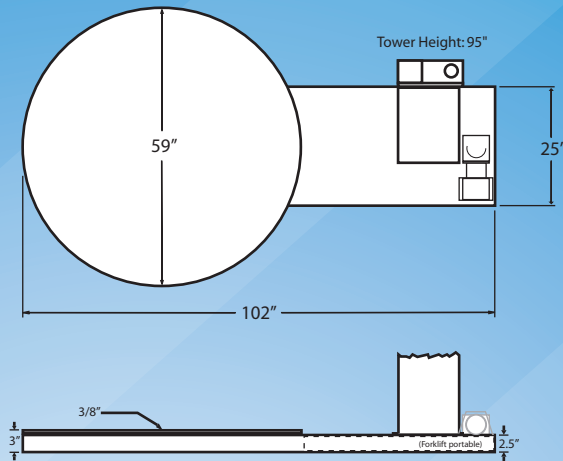

SPRING LOADED FILM
HOLDER ALLOWS FOR
QUICK AND EASY FILM
ROLL CHANGES

SPECIFICATIONS:

CONTROLS	PLC TOUCH SCREEN CONTROLS
PRODUCTION SPEED	1-40 LPH*
LOAD SIZE	55"L x 55"W x 91"H (80" Diagonal)
WEIGHT CAPACITY	5000LBS
STRUCTURAL	WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	1/2HP SCR DRIVE, 20:1 GEARBOX 32 TABLE SUPPORT WHEELS
TURNTABLE SPEED	0-15RPM
CARRIAGE DRIVE	1/2HP SCR DRIVE, #50 ANSI CHAIN
FILM DELIVERY	SPRING LOAD® DYNAMIC CARRIAGE 100%+ TENSION STRETCH NON-PRESTRETCH
FILM ROLL	20" MACHINE FILM, 3" CORE
POWER REQ.	115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	SAFEGUARD FULLY GUARDED TOWER & MOVING PARTS NO PINCH: CARRIAGE ROLLERS- ROTATE OUTWARD
ONBOARD PROGRAMS	STANDARD WRAP CYCLE STANDARD W/TOP COVER PAUSE BOTTOM WRAPS FIRST WRAP UPWARDS ONLY
OPTIONS	HEIGHT/BASE EXTENSION LOADING RAMP HEAVY DUTY EXTENDED RAMP (For powered hand trucks) INTEGRATED SCALE PACKAGE