



# OR-T 250

## A QUANTUM LEAP IN PLASTIC STRAP TOOLING



Easy to operate  
Maximum uptime  
Cost-efficient operation


Patent pending

 **ORGAPACK**

# OR-T 250



Quantum leap:  
Strapping with only one push of a button!

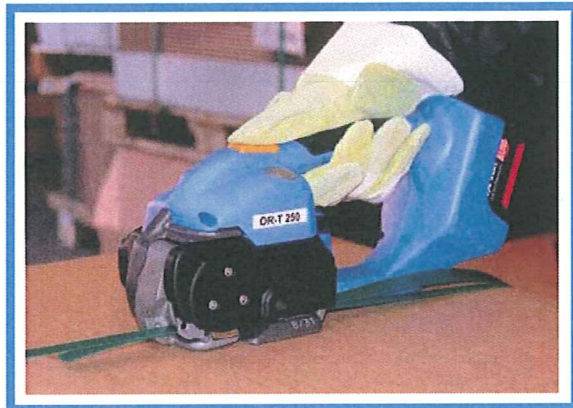

### Easy to use

- Semiautomatic and automatic settings
- Light or regular tension adjustment
- Simple one-button operation

### Maximum uptime

- Fully or semiautomatic tensioning, welding and strap cutting with the push of one button
- Up to 400 strapping cycles between recharges\*

*\*Number of cycles will vary depending on strap quality, package size and tension.*

### Low maintenance

- Brushless motor for less wear and longer life
- Innovative battery design reduces contact damage
- Recharging at any time



An ITW Company

Acme  
501 W. Lake Street  
Suite 105  
Elmhurst, IL 60126  
Phone 630-589-5100

[www.acme-ds.com](http://www.acme-ds.com)  
[www.acme-packaging.com](http://www.acme-packaging.com)

### Technical data

|                                 |                              |
|---------------------------------|------------------------------|
| Weight (including battery)      | 8.6 lbs                      |
| Dimensions                      |                              |
| – Length                        | 13.15"                       |
| – Width                         | 5.43"                        |
| – Height                        | 5.83"                        |
| Tensioning force                | 200–560 lbf                  |
| – Soft                          | 90–337 lbf                   |
| Tensioning speed                | 8.66"/sec.                   |
| Sealing                         | Friction-weld-seal           |
| <b>Battery charger, battery</b> |                              |
| Charger voltage                 | 100, 110, 230 V              |
| Battery charging time           | 20–45 minutes*               |
| No of cycles per battery, up to | 400**                        |
| Battery: Li-Ion (Bosch)         | 14.4 V, 2.6 Ah               |
| <b>Plastic strap</b>            | Polypropylene (PP)           |
| Polyester (PET)                 |                              |
| Width                           | 1/2", 5/8" (12–13, 15–16 mm) |
| – Option                        | 3/8" (9–11 mm)               |
| Thickness                       | .20–.40" (0.5–1.0 mm)        |

### Options

- Suspension bow
- Protection plate
- Protection cover
- Power supply

\* After 20 minutes, approx 70% charge capacity

\*\* Depending on strap quality, tension and package



Developed and  
manufactured  
in Switzerland

